


MOC series

(Multi Optical Connector)




MOC Cable Plug_2core

Part Number	KOPMM12010010
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	2Core 1.25mm Optic Ferrule
Cable	광전복합케이블 (O.D 6.8mm)

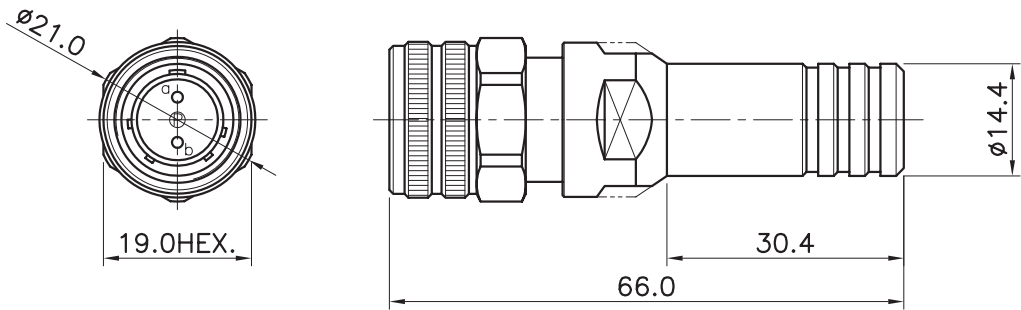


MOC Cable Socket_2Core

Part Number	KOPMM43010010
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	2Core 1.25mm Optic Ferrule
Cable	0.9mm Tight Buffer

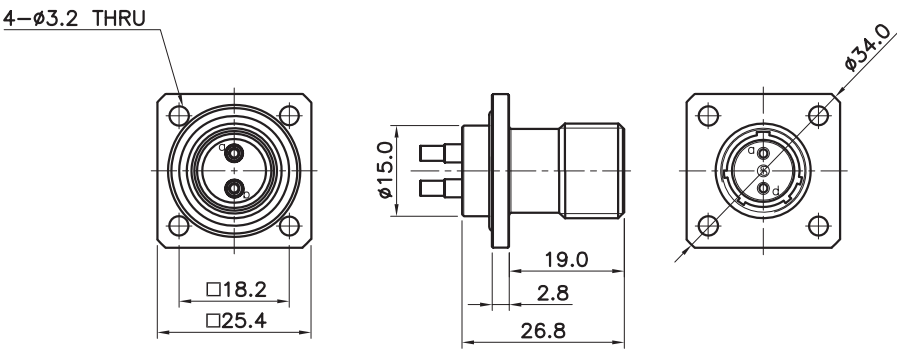


MOC Cable Plug_4core

Part Number	KOPMM12010020
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	4Core 1.25mm Optic Ferrule
Cable	광전복합케이블 (O.D 6.8mm)

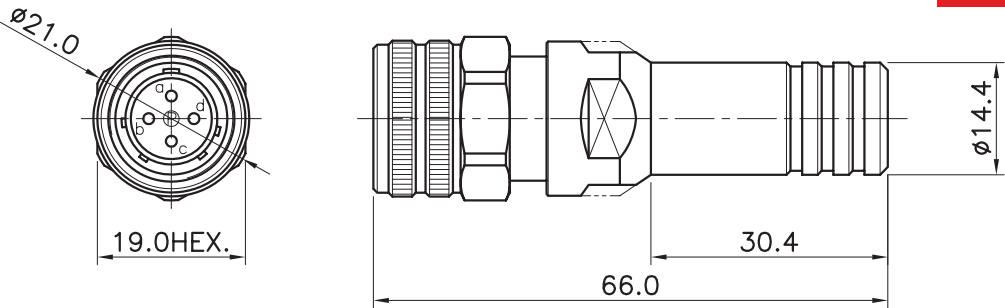


MOC Cable Socket_4Core

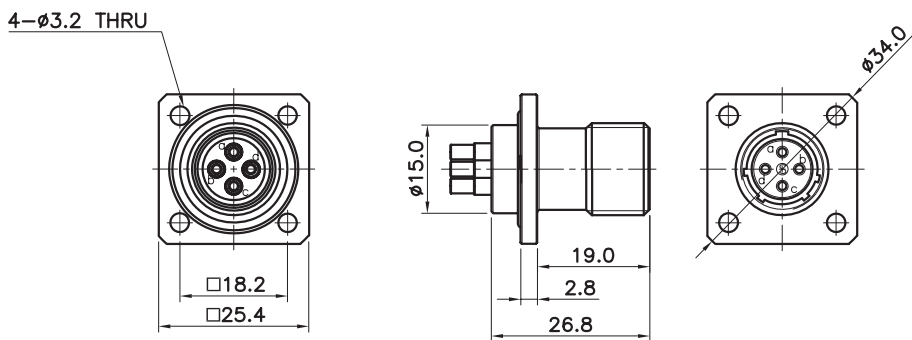

Part Number	KOPMM13010020
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	4Core 1.25mm Optic Ferrule
Cable	0.9mm Tight Buffer


MOC St. Cable Plug_6Core

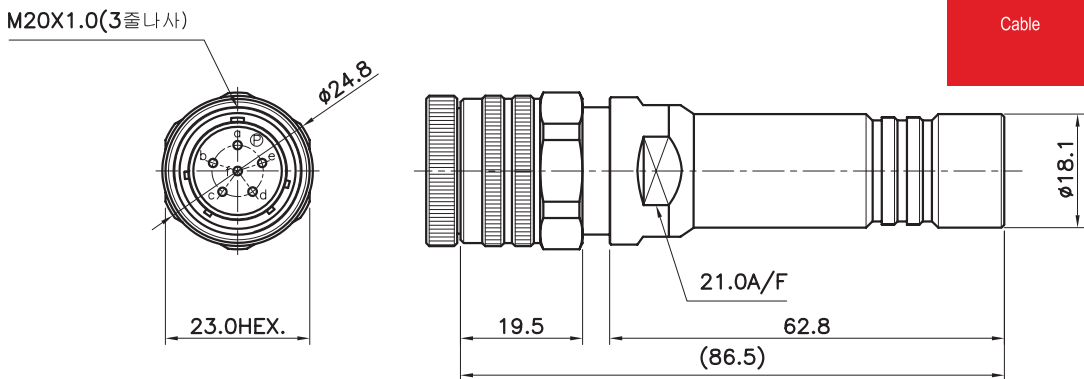

Part Number	KOPMM12010000
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	6Core 1.25mm Optic Ferrule
Cable	MOC (Inside Tube O.D 6.8mm, Outside Tube O.D 15.0mm)

MOC


MOC 4H F/M Cable Socket_6Core

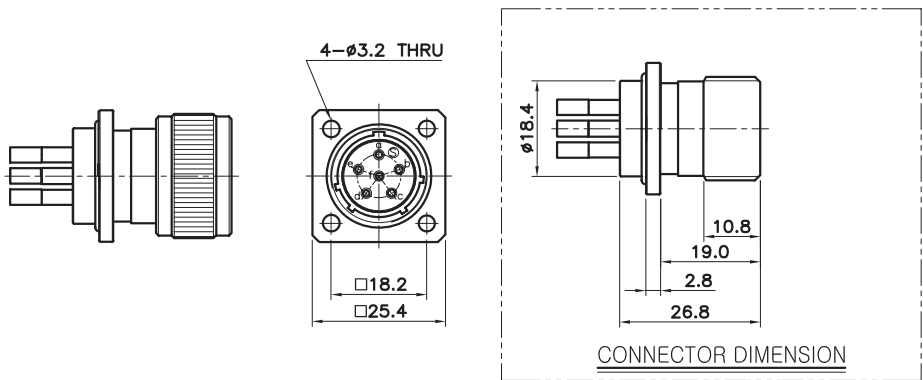

Part Number	KOPMM43010000
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	6Core 1.25mm Optic Ferrule
Cable	2.0mm Optic Fiber


MOC_8Core

Part Number	KOPMM12010030
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	8Core 1.25mm Optic Ferrule
Cable	광전복합케이블 (O.D 10.0mm)

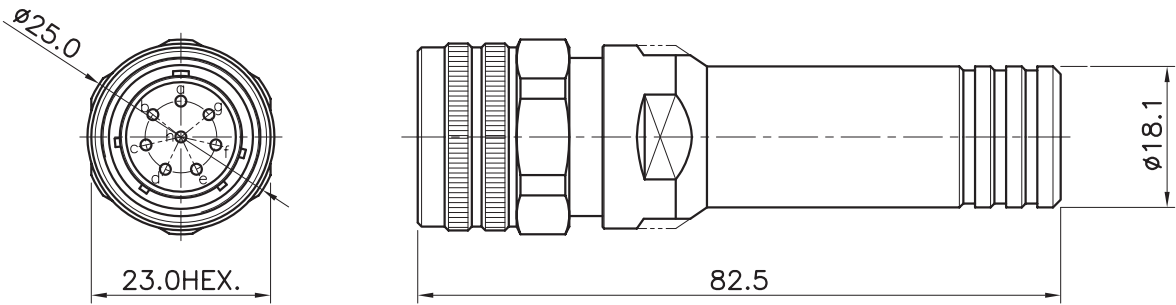

MOC Cable Soket_8Core

Part Number	KOPMM43010030
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Optic	8Core 1.25mm Optic Ferrule
Cable	0.9mm Tight Buffer

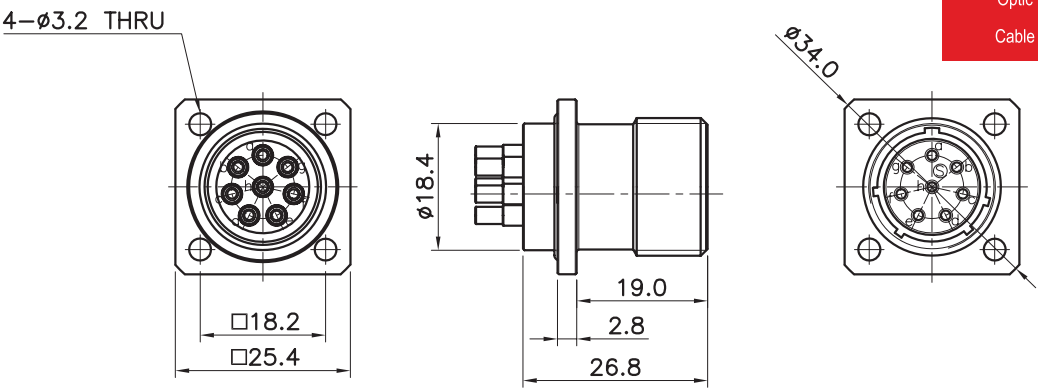


HCC series

(Hybrid Power&Optic Connector)




HCC Plug

Part Number	KOPAA12400000
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Power	2Way 48VDC Male Straight Plug
Optic	4Core 1.25mm Optic Ferrule
Cable	광전복합케이블 (O.D 13.3±0.2mm)

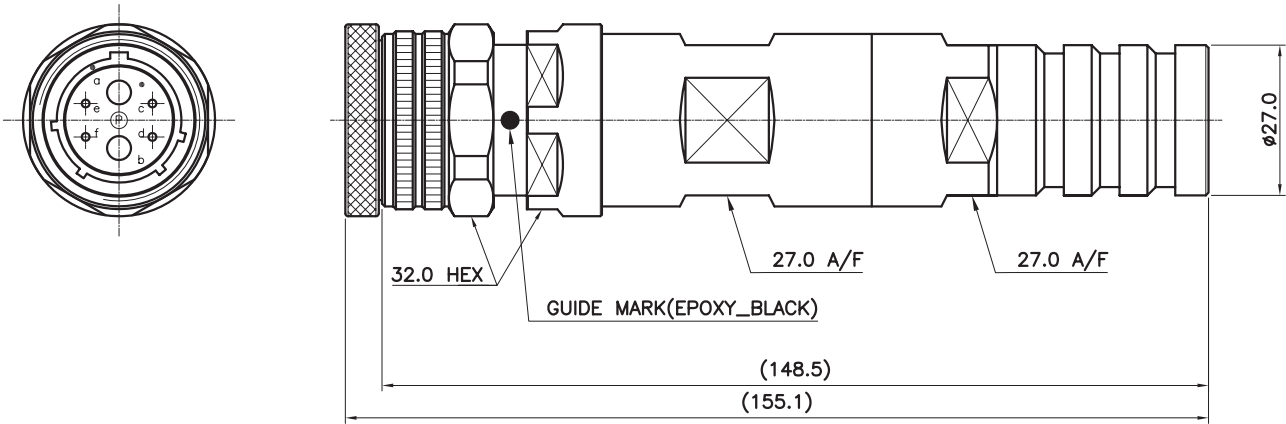

Hybrid Optic Fiber B/F Cable Socket (4*2)

Part Number	KOPAA21100000
파장	1310nm, 1550nm
Return Loss	-45dB Max.
Insertion Loss	-0.4dB Nominal
Power	2Way 48VDC Female Panel Receptacle
Optic	4Core 1.25mm Optic Ferrule

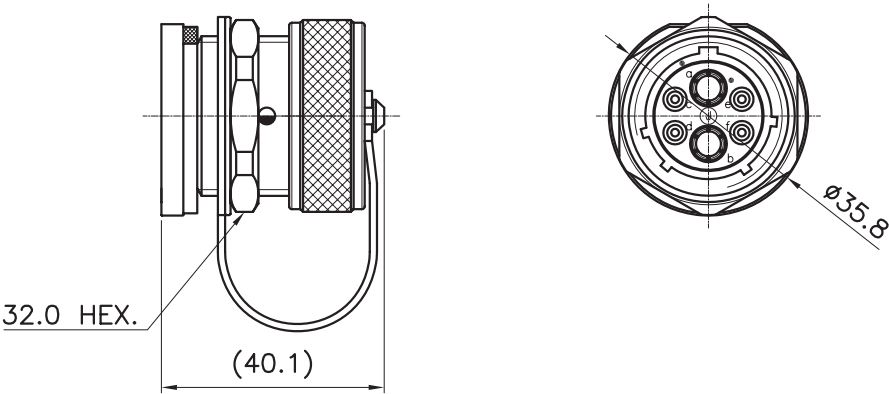

HCC