



Cable Strip Guide

1. Semi-Rigid Cable Strip Length

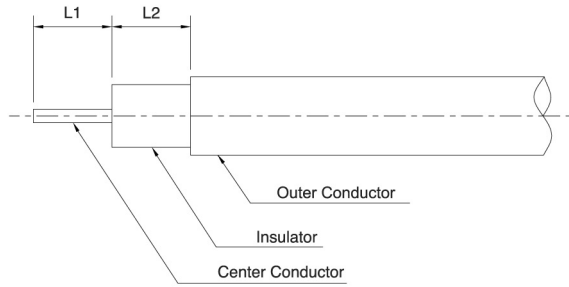

Cable Type	Connector	L1 (mm)	L2 (mm)
047 TP	SMA(P)	3.5	0.5
047 TP	SMA(J)S/C	3.0	0.5
085,141 TP/RG-405,402	SMA(P) / SMA(J)B · H	3.5	-
085,141 TP/RG-405,402	SMA(J)S · C / 2H / 4H	3.0	-
085,141 TP/RG-405,402	SMA(P)R · A	2.5	-
141 TP/RG-402	SMA(P)W · O	2.5	-
085,141 TP/RG-405,402	TNC(P) / (J)	4.5	-
085 TP/RG-405	N(P)	4.0	-
085 TP/RG-405	N(J)B · H	2.8	-
141 TP/RG-402	N(P) / N(J)B · H	3.5	-
250 TP	SMA(P) / A(J)S · C	2.5	-
250 TP	N(P)	5.6	-
250 TP	N(P)W · O	5.6	6.0

2. RG-Cable Strip Length

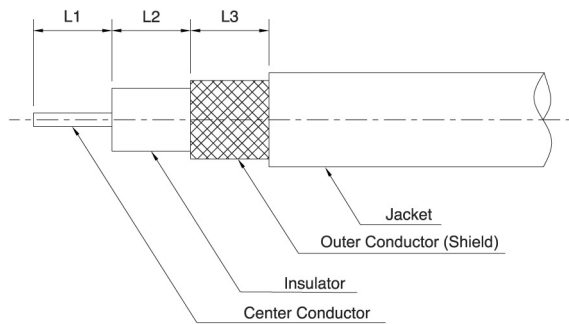

Cable Type	Connector	L1 (mm)	L3 (mm)
RG-178B/U	SMA(P)	3.0	0.5
RG-316DS, RG-400/U, RG-142B/U	SMA(P)	3.5	5.0
RG-316DS	SMA(P)R · A	2.0	5.0
RG-400/U, RG-142B/U	SMA(P)R · A	2.0	6.0
RG-316DS	SMA(J)B · H	3.5	5.5
RG-400/U, RG-142B/U	SMA(J)S · C	3.0	6.0
RG-400/U, RG-142B/U	BNC(P)	5.0	6.0
RG-316DS, RG-400/U, RG-142B/U	TNC(P)	3.0	6.0
RG-316DS	TNC(J)B · H	2.5	5.5
RG-400/U, RG-142B/U	TNC(J)B · H	3.5	6.0
RG-316DS	N(P)	5.0	5.5
RG-400/U, RG-142B/U	N(P)	3.5	6.0
RG-400/U, RG-142B/U	N(P)B · H	3.0	6.0
RG-214/U, RG-393, LMR400	N(P)	4.5	10.0